

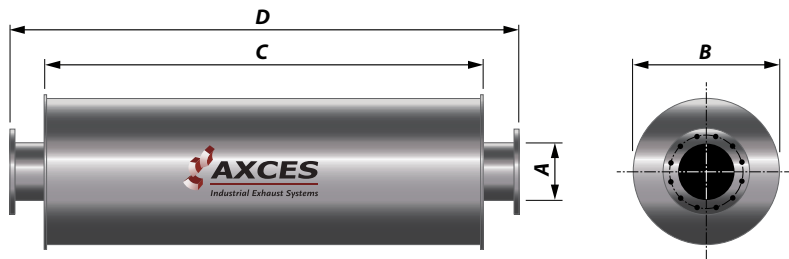


TYPE REAB35

Damping level 35 dB(A)
without integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
14010000015	1.5	40	48.3	200	750	900	10
14010000020	2	50	60.3	200	750	900	15
14010000025	2.5	60	76.1	260	850	1000	22
14010000030	3	80	88.9	310	850	1000	30
14010000040	4	100	114.3	360	1270	1500	50
14010000050	5	125	139.7	400	1270	1500	65
14010000060	6	150	168.3	475	1500	1750	125
14010000080	8	200	219.1	560	1750	2000	170
14010000100	10	250	273.0	635	2250	2500	250
14010000120	12	300	323.9	760	2500	2750	320
14010000140	14	350	355.6	800	2750	3000	410
14010000160	16	400	406.4	860	3000	3250	500
14010000180	18	450	457.2	910	3250	3500	565
14010000180	20	500	508.0	960	3500	3750	640

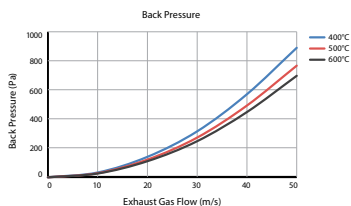

Damping Of The Noise Level ± 35 dB(A).

Damping Basics of the silencers type REAB35 are according to the reflection/absorption principle.

Spark Arrestor The silencers type REAB35 are excluding an integrated Spark Arrestor.

Mounting The silencers type REAB35 can be installed both horizontal and vertical.

Exhaust Gas Speed Advised Exhaust Gas Speed between 20-50 m/s.

Material Silencers type REAB35 are produced out of Steel 37-2 (S235JRG2).

Temperature Maximum allowable temperature is 600°C.

Custom Made Axces silencers are also manufactured based on specific dimensions or client's requirements.