


## GRAPHITE GASKET TYPE CIRCULAR JIS B2220 - 5K

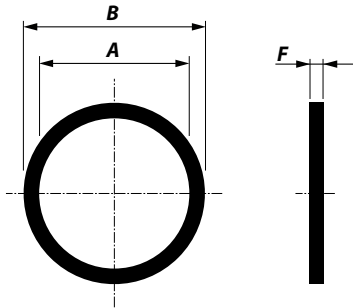

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213340030010	1	25	33.4	35	75	2	0.1
213340030013	1.25	32	42.2	43	90	2	0.1
213340030015	1.5	40	48.3	49	95	2	0.1
213340030020	2	50	60.3	61	105	2	0.1
213340030025	2.5	65	76.1	77	130	2	0.2
213340030030	3	80	88.9	90	145	2	0.2
213340030040	4	100	114.3	116	165	2	0.2
213340030050	5	125	139.7	142	200	2	0.2
213340030060	6	150	168.3	167	230	2	0.3
213340030080	8	200	219.1	218	280	2	0.3
213340030100	10	250	273.0	270	345	2	0.3
213340030120	12	300	323.9	321	390	2	0.3
213340030140	14	350	355.6	358	435	2	0.4
213340030160	16	400	406.4	409	495	2	0.4
213340030180	18	450	457.2	460	555	2	0.4
213340030200	20	500	508.0	511	605	2	0.5
213340030240	24	600	609.6	613	715	2	0.8
213340030280	28	700	711.2	715	820	2	0.8
213340030320	32	800	812.8	817	930	2	0.8
213340030360	36	900	914.4	919	1030	2	1
213340030400	40	1000	1016.0	1021	1130	2	1

### CHARACTERISTICS

**Material** Gaskets are produced out of graphite

**Range** Diameter range from 33.4 mm up to 1016 mm

**Thickness** 2 mm, with an option for 3 and 4 mm

**Temperature** The maximum allowable temperature is 600°C