


GRAPHITE GASKET TYPE FULL FACE DIN 2573 - PN6

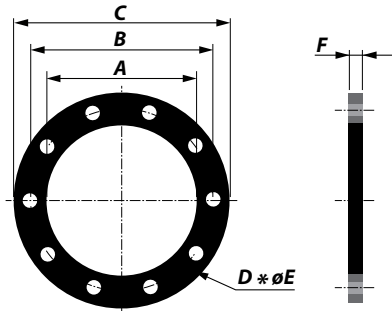

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	C (mm)	D Number of holes	E Diameter of holes (mm)	F (mm)	Weight (kg)
213100020010	1	25	33.4	35	75	100	4	11	2	0.1
213100020013	1.25	32	42.2	43	90	120	4	14	2	0.1
213100020015	1.5	40	48.3	49	100	130	4	14	2	0.1
213100020020	2	50	60.3	61	110	140	4	14	2	0.1
213100020025	2.5	65	76.1	73	130	160	4	14	2	0.2
213100020030	3	80	88.9	90	150	190	4	18	2	0.2
213100020040	4	100	114.3	116	170	210	4	18	2	0.2
213100020050	5	125	139.7	142	200	240	8	18	2	0.2
213100020060	6	150	168.3	171	225	265	8	18	2	0.3
213100020080	8	200	219.1	222	280	320	8	18	2	0.3
213100020100	10	250	273.0	276	335	375	12	18	2	0.3
213100020120	12	300	323.9	327	395	440	12	22	2	0.3
213100020140	14	350	355.6	360	445	490	12	22	2	0.4
213100020160	16	400	406.4	411	495	540	16	22	2	0.4
213100020180	18	450	457.2	461	550	595	16	22	2	0.4
213100020200	20	500	508.0	512	600	645	20	22	2	0.5
213100020240	24	600	609.6	614	705	755	20	26	2	0.8
213100020280	28	700	711.2	716	810	860	24	26	2	0.8
213100020320	32	800	812.8	818	920	975	24	30	2	0.8
213100020360	36	900	914.4	920	1020	1075	24	30	2	1
213100020400	40	1000	1016.0	1022	1120	1022	28	30	2	1

CHARACTERISTICS

Gaskets Hole pattern according type DIN 2573 - PN6

Material Gaskets are produced out of graphite

Range Diameter range from 33.4 mm up to 1016 mm

Thickness 2 mm, with an option for 3 and 4 mm

Temperature The maximum allowable temperature is 600°C