


## GRAPHITE GASKET TYPE CIRCULAR DIN 2573 - PN6

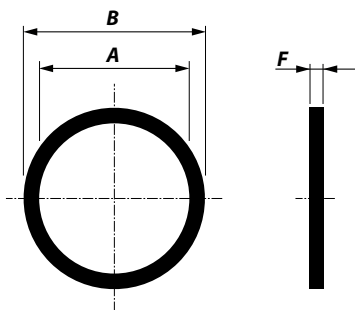

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213300030010	1	25	33.4	35	75	2	0.1
213300030013	1.25	32	42.2	43	90	2	0.1
213300030015	1.5	40	48.3	49	100	2	0.1
213300030020	2	50	60.3	61	110	2	0.1
213300030025	2.5	65	76.1	73	130	2	0.2
213300030030	3	80	88.9	90	150	2	0.2
213300030040	4	100	114.3	116	170	2	0.2
213300030050	5	125	139.7	142	200	2	0.2
213300030060	6	150	168.3	171	225	2	0.3
213300030080	8	200	219.1	222	280	2	0.3
213300030100	10	250	273.0	276	335	2	0.3
213300030120	12	300	323.9	327	395	2	0.3
213300030140	14	350	355.6	360	445	2	0.4
213300030160	16	400	406.4	411	495	2	0.4
213300030180	18	450	457.2	461	550	2	0.4
213300030200	20	500	508.0	512	600	2	0.5
213300030240	24	600	609.6	614	705	2	0.8
213300030280	28	700	711.2	716	810	2	0.8
213300030320	32	800	812.8	818	920	2	0.8
213300030360	36	900	914.4	920	1020	2	1
213300030400	40	1000	1016.0	1022	1120	2	1

### CHARACTERISTICS

**Material** Gaskets are produced out of graphite

**Range** Diameter range from 33.4 mm up to 1016 mm

**Thickness** 2 mm, with an option for 3 and 4 mm

**Temperature** The maximum allowable temperature is 600°C